



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Features


1 or 2 Pole electromechanical step relay with electrically separate coil and contact circuits

- Choice of 6 switching sequences
- Screw terminal connections
- AC coil
- Panel mount
- Cadmium free contact material


26.01



- Single phase switch 1 NO (SPST-NO)



26.01




26.02, 04, 06, 08



- Double phase switch 2 NO (DPST-NO)




26.02
26.04
26.06
26.08




26.03



- 1 NO + 1 NC (SPST-NO + SPST-NC)



26.03



Contact specification

		1 NO (SPST-NO)	2 NO (DPST-NO)	1NO+1NC (SPST-NO+SPST-NC)
Number of contacts		1 NO (SPST-NO)	2 NO (DPST-NO)	1NO+1NC (SPST-NO+SPST-NC)
Rated current/Maximum peak current	A	10/20	10/20	10/20
Rated voltage/Maximum switching voltage V AC		250/400	250/400	250/400
Rated load AC1	VA	2,500	2,500	2,500
Rated load AC15 (230 V AC)	VA	500	500	500
Nominal lamp rating: incandescent (230 V)	W	800	800	800
compensated fluorescent (230 V)	W	360	360	360
uncompensated fluorescent (230 V)	W	500	500	500
halogen (230 V)	W	800	800	800
Minimum switching load	mW (V/mA)	1,000 (10/10)	1,000 (10/10)	1,000 (10/10)
Standard contact material		AgNi	AgNi	AgNi

Coil specification

Nominal voltage (U _N)	V AC (50 Hz)	12 - 24 - 48 - 110 - 230	12 - 24 - 48 - 110 - 230	12 - 24 - 48 - 110 - 230
	V DC	—	—	—
Rated power AC/DC	VA (50 Hz)/W	4.5/—	4.5/—	4.5/—
Operating range	AC (50 Hz)	(0.8...1.1)U _N	(0.8...1.1)U _N	(0.8...1.1)U _N
	DC	—	—	—

Technical data

Mechanical life AC/DC	cycles	300 · 10 ³	300 · 10 ³	300 · 10 ³
Electrical life at rated load in AC1	cycles	100 · 10 ³	100 · 10 ³	100 · 10 ³
Minimum/Maximum impulse duration		0.1s/1h (according to EN 60669)	0.1s/1h (according to EN 60669)	0.1s/1h (according to EN 60669)
Insulation between coil and contacts (1.2/50 µs)	kV	4	4	4
Ambient temperature range	°C	−40...+40	−40...+40	−40...+40
Protection category		IP 20	IP 20	IP 20

Approvals (according to type)



Ordering information

Example: 26 series screw terminal, panel mount relay, double phase switch 2 NO (DPST-NO) 10 A contacts, coil rated 12 V AC.

2 6 . 0 2 . 8 . 0 1 2 . 0 0 0 0

Series _____
Type _____
 0 = Screw terminal
No. of poles _____
 1 = Single phase switch 1 NO (SPST-NO)
 2 = Double phase switch 2 NO (DPST-NO)
 3 = Double phase switch 1 NO + 1 NC (SPST-NO + SPST-NC)
 4 = 4 sequences double phase switch 2 NO (DPST-NO)
 6 = 3 sequences double phase switch 2 NO (DPST-NO)
 8 = 4 sequences double phase switch 2 NO (DPST-NO)

Coil voltage _____
 See coil specifications
Coil version _____
 8 = AC (50 Hz)

Technical data

Insulation

Dielectric strength		
between supply and contacts	V AC	3,500
between open contacts	V AC	2,000
between adjacent contacts	V AC	2,000

Other data	26.01, 26.03, 26.08	26.02, 26.04, 26.06
Power lost to the environment		
with rated current and coil de-energised W	0.9	1.8
⊕ Screw torque	Nm	0.8
Max. wire size	solid cable	stranded cable
	mm ²	mm ²
	1x4 / 2x2.5	1x2.5 / 2x2.5
	AWG	AWG
	1x12 / 2x14	1x14 / 2x14


Coil specifications

AC version data

Nominal voltage	Coil code	Operating range		Resistance	Consumption
U_N		U_{min}	U_{max}	R	I at U_N
V		V	V	Ω	(50 Hz) mA
12	8.012	9.6	13.2	17	370
24	8.024	19.2	26.4	70	180
48	8.048	38.4	52.8	290	90
110	8.110	88	121	1,500	40
230	8.230	184	253	6,250	20


Type	Number of steps	Sequence			
		1	2	3	4
26.01	2				
26.02	2				
26.03	2				
26.04	4				
26.06	3				
26.08	4				

Wiring diagrams

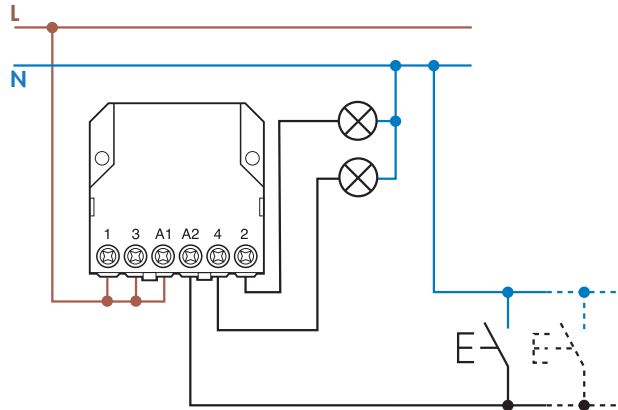

Accessories

for 12 and 24 V DC control applications

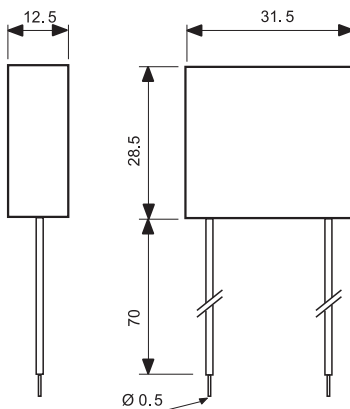


Type: 026.9.012

Nominal voltage: 12 V DC
Max temperature: + 40 °C
Operating range: $(0.9 \dots 1.1) U_N$


Type: 026.9.024

Nominal voltage: 24 V DC
Max temperature: + 40 °C
Operating range: $(0.9 \dots 1.1) U_N$

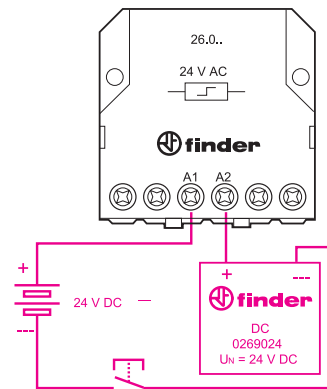


Example of wiring for 24 V DC control application.

Module for use with illuminated push buttons (230 V AC applications)

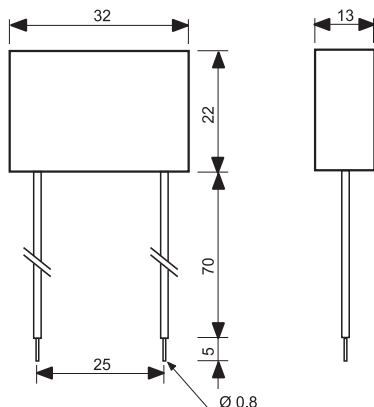

Type 026.00

Sealed construction, 7.5 cm insulated flexible wire termination.



Example of wiring diagram of type 026.00

This module is necessary when using between 1 and a maximum of 15 illuminated push buttons in the coil circuit (Each 1 mA max, 230 V AC). It must be connected in parallel to the coil of the relay (see diagram).

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Capacitor for use with illuminated push-buttons	02600	026.00	Buy on EAN
Adaptor for use with 12VDC supply	0269012	026.90.1.2	Buy on EAN
Adaptor for use with 24VDC supply	0269024	026.90.2.4	Buy on EAN
Single phase switch; 1 NO	260180120000	26.01.8.012.0000	Buy on EAN
Single phase switch; 1 NO	260180240000	26.01.8.024.0000	Buy on EAN
Single phase switch; 1 NO	260180480000	26.01.8.048.0000	Buy on EAN
Single phase switch; 1 NO	260181100000	26.01.8.110.0000	Buy on EAN
Single phase switch; 1 NO	260182300000	26.01.8.230.0000	Buy on EAN
Double phase switch; 2 NO	260280120000	26.02.8.012.0000	Buy on EAN
Double phase switch; 2 NO	260280240000	26.02.8.024.0000	Buy on EAN
Double phase switch; 2 NO	260280480000	26.02.8.048.0000	Buy on EAN
Double phase switch; 2 NO	260281100000	26.02.8.110.0000	Buy on EAN
Double phase switch; 2 NO	260282300000	26.02.8.230.0000	Buy on EAN
Double phase switch; 1 NC + 1 NO	260380120000	26.03.8.012.0000	Buy on EAN
Double phase switch; 1 NC + 1 NO	260380240000	26.03.8.024.0000	Buy on EAN
Double phase switch; 1 NC + 1 NO	260380480000	26.03.8.048.0000	Buy on EAN

Double phase switch; 1 NC + 1 NO	260381100000	26.03.8.110.0000	Buy on EAN
Double phase switch; 1 NC + 1 NO	260382300000	26.03.8.230.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260480120000	26.04.8.012.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260480240000	26.04.8.024.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260480480000	26.04.8.048.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260481100000	26.04.8.110.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260482300000	26.04.8.230.0000	Buy on EAN
3 sequence double phase switch; 2 NO	260680120000	26.06.8.012.0000	Buy on EAN
3 sequence double phase switch; 2 NO	260680240000	26.06.8.024.0000	Buy on EAN
3 sequence double phase switch; 2 NO	260680480000	26.06.8.048.0000	Buy on EAN
3 sequence double phase switch; 2 NO	260681100000	26.06.8.110.0000	Buy on EAN
3 sequence double phase switch; 2 NO	260682300000	26.06.8.230.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260880120000	26.08.8.012.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260880240000	26.08.8.024.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260880480000	26.08.8.048.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260881100000	26.08.8.110.0000	Buy on EAN
4 sequence double phase switch; 2 NO	260882300000	26.08.8.230.0000	Buy on EAN