




The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Clasă izolație	II (conform standardelor IEC 61140)	Culoare	Alb RAL 9016
Dim. exterioare LxHxP (mm)	330x270x85	Clasă de protecție IP	IP40
Instalare	Cu montaj îngropat	Putere disipabilă (W)	36
Cod IK	IK08	Tensiune nominală	400 V
Culoare ușă	Transparent fumuriu	Cutii cu borne	80 A - orificii cu șuruburi IP20
Nr. module EN 50022	12	Curent nominal	125 A
Glow Test conductori	650 °C	Temperatură de operare	-15 +60 °C
Tip de material	Fără halogen conform EN 60754-2	Electrocod	0311
Termo-presiune cu bilă	70 °C	Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Tensiune izolație	750 V	Stâlp 1 (mm²)	N/E (3x16) + (11x10)
Stâlp 2 (mm²)	N/E (3x16) + (11x10)		




DIMENSIONAL

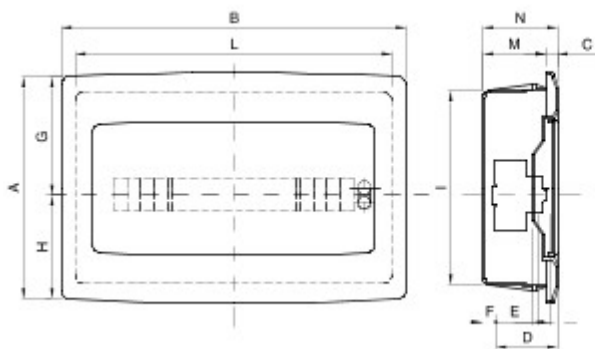

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604 GW 40 884	193	240	12	97	75	48	14	115	90	162	200	85
12M	GW 40 605 GW 40 885	270	330	16	101	75	48	17	148	122	230	290	85
18M	GW 40 608 GW 40 888	310	465	16	101	75	48	17	165	145	260	427	85

TECHNICAL SYMBOLOGY



IP

IP40

IK

IK08

GWT

650 °C



-15 +60 °C

HF

Fără halogen
conform EN 60754-2



70 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 08/02/2023

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice