

Technical data sheet

Screwless terminal, 8-pin, RUM

Item no. 2475024



Screwless terminal to connect single-strand cables.
Nominal cross-section 2,5 mm²
Rated voltage 450 V
Rated current 24 A

To connect 8 conductors 0,5 to 2,5 mm²
Stripping length 10 mm




PA Polyamide

Product text, scope of delivery | The scope of delivery comprises 1 bag with 10 universal clamps

Master data

Item no.	2475024
Type	61 825 LGR
Description 1	Plug-in terminal
Description 2	Screwless terminal
Dimension	8x2,5mm ²
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1,00 PU
Weight	4,90 kg/100 PUs

Technical data

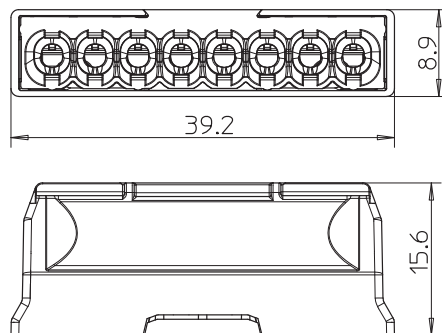

Length	39,20 mm
Width	15,60 mm
Height	8,90 mm
Connectable conductor cross-section, single-wire	0,50 - 2,50 mm ²
Connectable conductor cross-section, multi-wire	1,50 - 2,50 mm ²
No. of terminals	8,00
Flame resistant	Flame resistant to VDE 0471/DIN 695 Part 2-1, test temperature 850 °C
Suitable for flexible conductors	☐
Suitable for solid conductors	☐
Suitable for multi-wire conductors	☒
With actuating levers	☐
Nominal cross section	2,50 mm ²
Nominal voltage	450,00 V
Nominal current	24,00 A

Technical data sheet

Screwless terminal, 8-pin, RUM

Item no. 2475024



Technical data

Pole number	8,00
max. permitted ambient temperature	-5,00 - 90,00 °C
Ambient temperature	T 90 °C