



CorePro Plastic LEDcandles & lusters

CorePro lustre ND 7-60W E14 865 P48 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters and are available in multiple color temperatures. LED lamps deliver huge energy savings of up to 80% energy-saving compared with halogen lamps and provide excellent quality of light. By offering a lifetime of 15,000 hours it lowers maintenance costs. The CorePro LED candles and lusters are perfect for your basic lighting needs.

Product data


| General Information | | Stroboscopic effect value (SVM) | |
|---------------------------------------|--------------------|---------------------------------|-------------|
| Lighting Technology | LED | 0.4 | |
| Flux measurement reference | Sphere | Operating and Electrical | |
| Switching Cycle | 50,000 | Line Frequency | 50 to 60 Hz |
| Nominal lifetime | 15,000 hour(s) | Input Frequency | 50 to 60 Hz |
| Cap-Base | E14 [E14] | Power Consumption | 7 W |
| Light Technical | | Lamp Current (Nom) | 59 mA |
| Color Code | 865 [CCT of 6500K] | Wattage Equivalent | 60 W |
| Luminous Flux | 806 lumen | Starting Time (Nom) | 0.5 s |
| Color Designation | Cool Daylight | Warm-up time to 60% light | 0.5 s |
| Correlated Color Temperature (Nom) | 6500 K | Power Factor (Fraction) | 0.51 |
| Luminous Efficacy (rated) (Nom) | 115.00 lm/W | Voltage (Nom) | 220-240 V |
| Color Consistency | <6 | Temperature | |
| Color rendering index (CRI) | 80 | T-Case Maximum (Nom) | 87 °C |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % | | |
| Flickering value (PstLM) | 1 | | |

CorePro Plastic LEDcandles & lusters

| | |
|-------------------------------|--------------|
| Controls and Dimming | |
| Dimmable | No |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| Bulb Shape | P48 [P 48mm] |
| Approval and Application | |
| Energy Efficiency Class | E |
| Energy Consumption kWh/1000 h | 7 kWh |
| EPREL Registration Number | 453217 |
| CE mark | Yes |
| EU RoHS compliant | Yes |



| | |
|---------------------------------|--|
| Product Data | |
| Full product code | 871951431310100 |
| Order product name | CorePro lustre ND 7-60W E14 865 P48 FR |
| Order code | 929002973502 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material number (12NC) | 929002973502 |
| Full product name | CorePro lustre ND 7-60W E14 865 P48 FR |
| EAN/UPC - Case | 8719514313118 |

Dimensional drawing



| Product | D | C |
|--|-------|--------|
| CorePro lustre ND 7-60W E14 865 P48 FR | 35 mm | 106 mm |

Photometric data

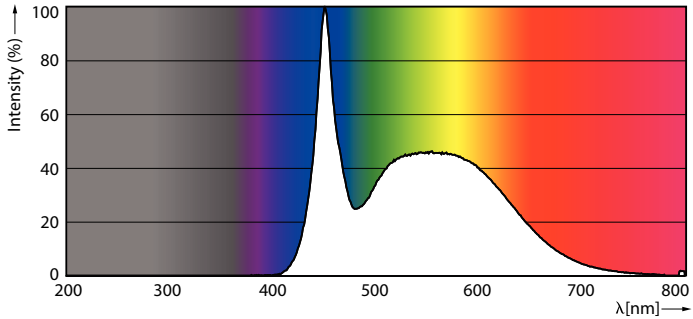


General uniform lighting - CorePro lustre ND 7-60W E14 865 P48 FR

Spectral Power Distribution Colour - CorePro lustre ND 7-60W E14 865 P48 FR


CorePro Plastic LEDcandles & lusters

Photometric data




Light Distribution Diagram - CorePro lustre ND 7-60W E14 865 P48 FR

Lifetime

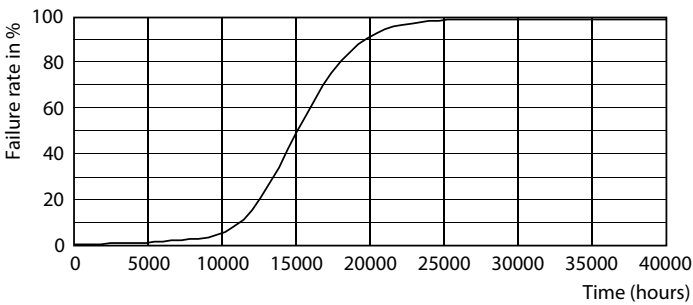

Life Expectancy Diagram - CorePro lustre ND 7-60W E14 865 P48 FR

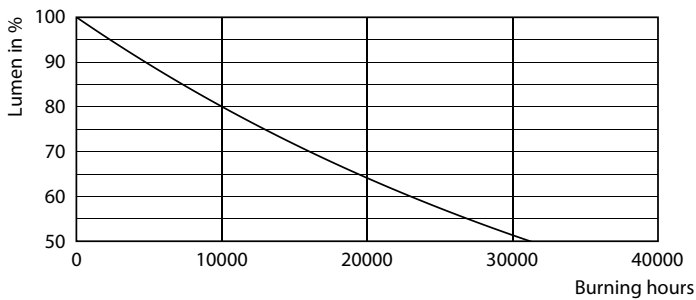

Lumen Maintenance Diagram - CorePro lustre ND 7-60W E14 865 P48 FR

