




The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Clasă izolație	II (conform standardelor IEC 61140)	Culoare	Alb RAL 9016
Dim. exterioare LxHxP (mm)	465x680x95	Clasă de protecție IP	IP40
Instalare	Cu montaj îngropat	Putere disipabilă (W)	62
Cod IK	IK08	Tensiune nominală	400 V
Culoare ușă	Transparent fumuriu	Cutii cu borne	80 A - orificii cu șuruburi IP20
Nr. module EN 50022	54 (18x3)	Curent nominal	125 A
Glow Test conductori	650 °C	Temperatură de operare	-15 +60 °C
Tip de material	Fără halogen conform EN 60754-2	Electrocod	0311
Termo-presiune cu bilă	70 °C	Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Tensiune izolație	750 V	Stâlp 1 (mm²)	N/E 2x[(3x16) + (17x10)]
Stâlp 2 (mm²)	N/E 2x[(3x16) + (17x10)]		




DIMENSIONAL

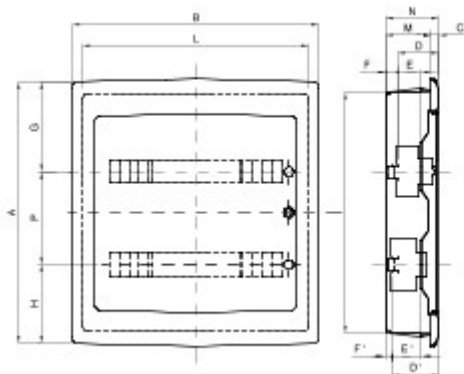

		A	B	C	N	D	E	F	G	H	P	D	E	F	I	L	M
24M	GW 40 606 GW 40 886	420	330	16	101	75	48	17	148	122	150	-	-	-	380	290	85
36M	GW 40 609 GW 40 889	505	465	16	101	75	48	17	175	155	175	-	-	-	465	427	85
54M	GW 40 610 GW 40 890	680	465	25	120	75	48	37	175	155	175	101	74	11	630	415	95
72M	GW 40 611 GW 40 891	880	465	25	120	75	48	37	175	155	175	101	74	11	805	415	95

TECHNICAL SYMBOLOGY



IP

IP40

IK

IK08

GWT

650 °C



-15 +60 °C

HF

Fără halogen
conform EN 60754-2



70 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 08/02/2023

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice