

ELIA FL

GEWISS

FLOODLIGHT LED



CE

IP66

0,3m
200W

RG1→0,2m
RG0→6,6m


+50°C
-30°C

t_a


+50°C

		 Kg		
	50W	2,6	0.013 m²	0.05 m²
	100W	3,9	0.022 m²	0.1 m²
	150W	4,5	0.024 m²	0.12 m²
	200W	6,3	0.03 m²	0.15 m²


	V	
	ON-OFF	100-240 V 50/60 Hz
	DALI	220-240 V 50/60 Hz

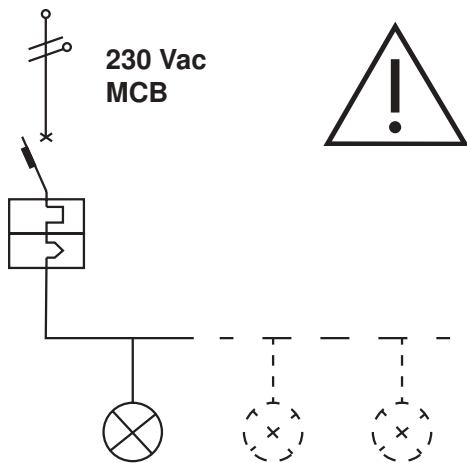

MCB Type C:		10A	16A	20A
50W	ON-OFF	Max n.10	Max n.40	Max n.20
100W	ON-OFF	Max n.4	Max n.16	Max n.9
	DALI	Max n.3	Max n.6	Max n.7
150W	ON-OFF	Max n.4	Max n.10	Max n.8
	DALI	Max n.3	Max n.6	Max n.7
200W	ON-OFF	Max n.4	Max n.9	Max n.7
	DALI	Max n.4	Max n.6	Max n.8




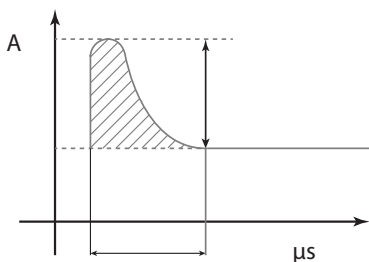



Inrush current peak and width:		
50W	ON-OFF	45A / 100µS
100W	ON-OFF	70A / 200µS
	DALI	60A / 850µS
150W	ON-OFF	110A / 200µS
	DALI	65A / 550µS
200W	ON-OFF	120A / 200µS
	DALI	60A / 510µS

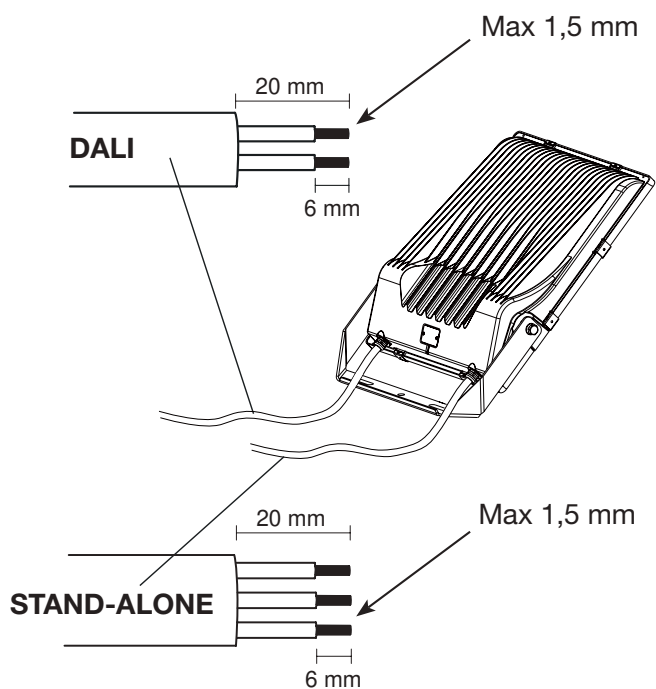








L
N
+
DALI 1
DALI 2

	DALI	STAND-ALONE
50W	✗	✓
100W	✓	✓
150W	✓	✓
200W	✓	✓

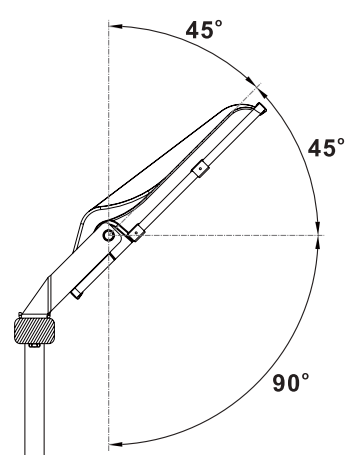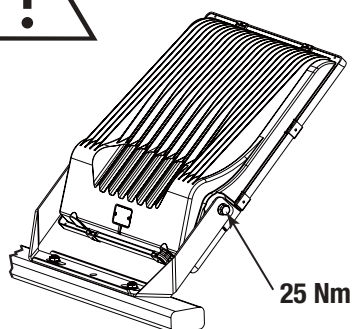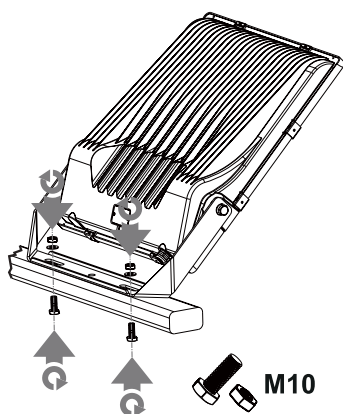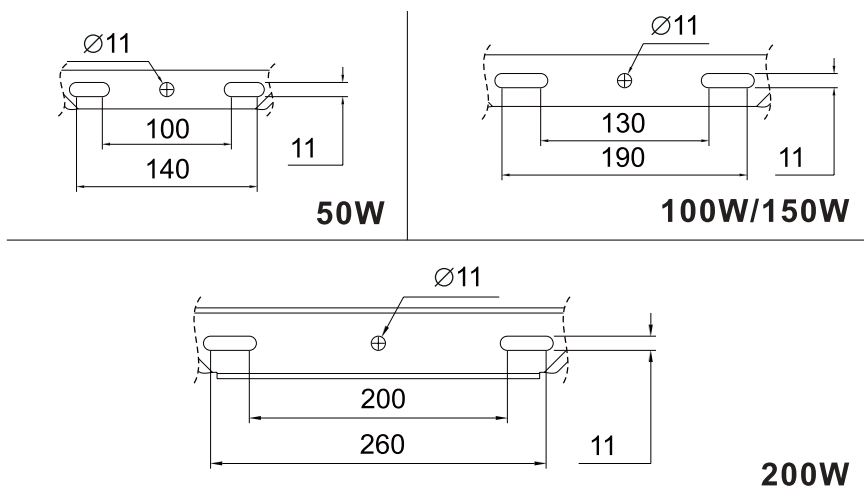










GW F1 901

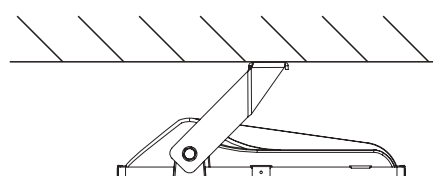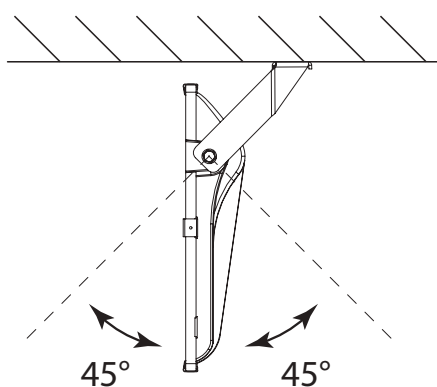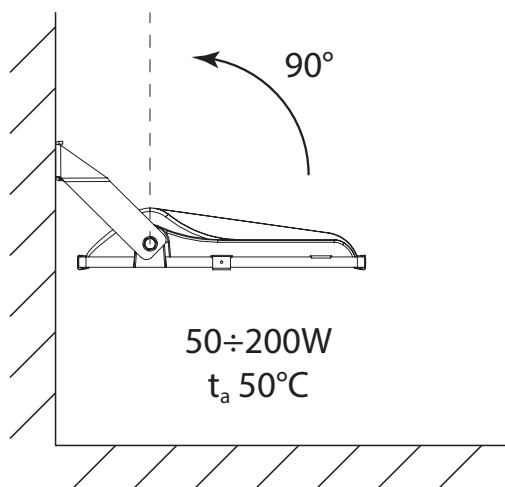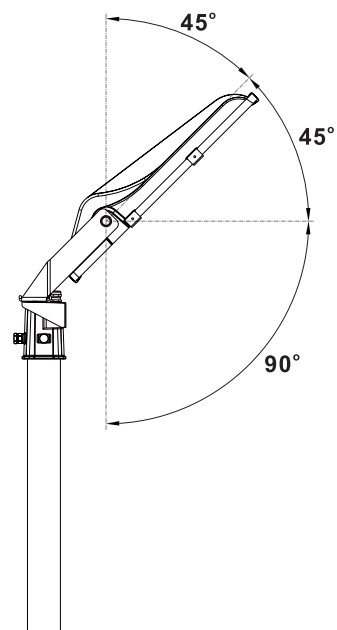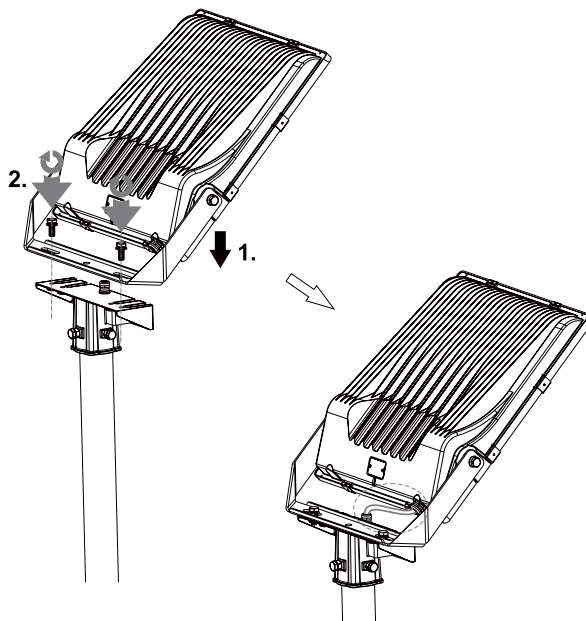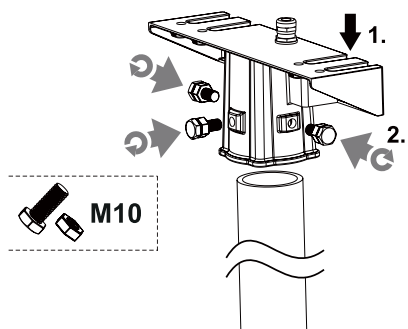

50÷150W	$t_a 50^\circ\text{C}$
---------	------------------------

200W	MAX $t_a 40^\circ\text{C}$
------	----------------------------

50÷200W
 $t_a 50^\circ\text{C}$

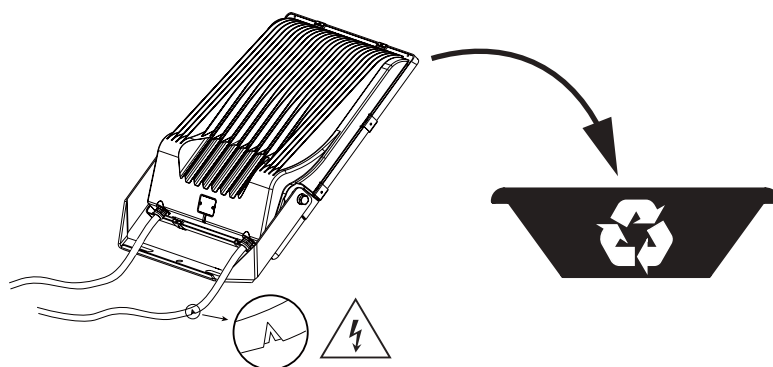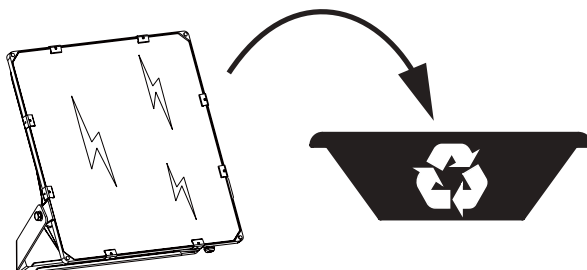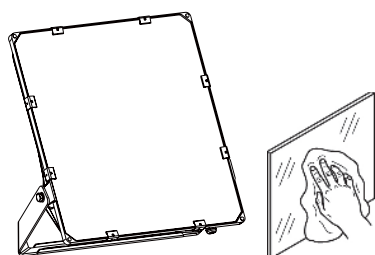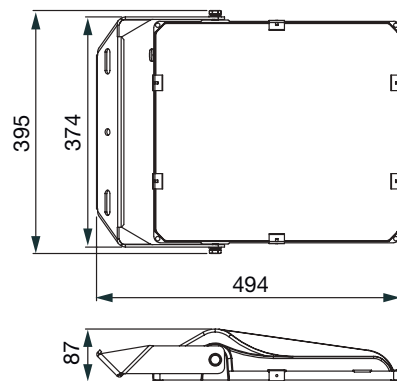**S2****M2****L2****XL2**

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì - venerdì - monday - friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com