


LED Floodlight without sensor

XLED home 2 SL

V2 white

EAN 4007841 033125

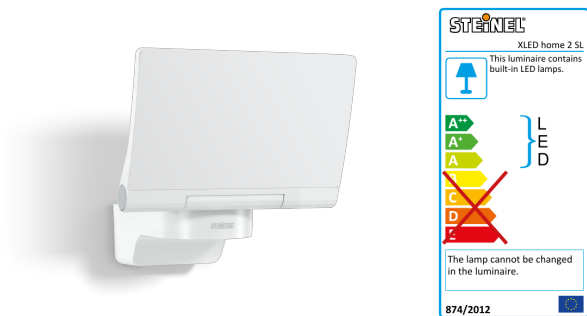

LED

30 years (Ø 4,5h / day)



3000K warm-white



IP44



180° horizontal, 180° vertikal



networkable via cable



energy saving

5 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie

manufacturer's warranty
steinel.de/garantie



CE

Function description

Dazzlingly stylish LED floodlight. XLED home 2 SL – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1443 lm at 13 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	13 W
Power consumption	0,5 W
Luminous flux	1443 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	HCMC (High Conductive Magnesium Composite)
With motion detector	No
Photo-cell controller	No

Basic light level function	No
Main light adjustable	No
Settings via	Potentiometers
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
PU1, net weight	0,483 kg
Version	white
PU1, EAN	4007841033125

Accessories

EAN 4007841 055615 Corner wall mount XLED home 2

XLED home 2 SL

EAN 4007841 033125



Technical line drawing of the BODUM Duetto toilet seat. The drawing includes two views: a side profile view on the left and a front view on the right. Dimensions are indicated with arrows and numbers:

- Side View (Left):**
 - Height: 181
 - Width: 161
- Front View (Right):**
 - Width: 180

The figure includes a light distribution diagram on the left and a list of technical specifications on the right.

Light distribution diagram: A circular diagram showing the beam spread. The horizontal axis is marked with 150°, 180°, and 150°. The vertical axis is marked with 120°, 90°, and 60°. Concentric circles represent beam diameters of 100 and 200 cm. A solid orange line represents the C0 / C180 beam, and a dashed orange line represents the C90 / C270 beam. The C0 / C180 beam is wider, reaching the 200 cm circle at approximately 60° from the vertical. The C90 / C270 beam is narrower, reaching the 100 cm circle at approximately 60° from the vertical.

Technical specifications:

Output	13 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1443 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)