


Sensor-switched LED floodlight

LS 150 LED

black

EAN 4007841 052546



LED

30 years (Ø 4,5h / day)



4000K neutral white



infrared sensor 240°



max. 12 m



IP44



2 - 1000 lux



10 sec - 15 min



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



CE

Function description

Extremely bright, robust and vigilant: the LS 150 LED sensor-switched floodlight. On-demand light for illuminating large areas around buildings. Infrared sensor with 240° angle of coverage and 12 m reach. Light output 1760 lm, colour temperature 4000 K, power consumption 20,5 W. Robust aluminium floodlight head. Available in black or white.

Technical specifications

Dimensions (L x W x H)	176 x 155 x 210 mm
Mounting height max.	4,00 m
Output	20,5 W
Interconnection	No
Luminous flux	1760 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
With motion detector	Yes
Angle of aperture	180 °

Sneak-by guard	Yes
Time setting	10 s – 15 Min.
Main light adjustable	No
Settings via	Potentiometers
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Ambient temperature	-10 – 40 °C
Housing material	Aluminium
Manufacturer's Warranty	3 years
PU1, net weight	0,883 kg
Version	black
PU1, EAN	4007841052546

Accessories

EAN 4007841 630560 Corner wall mount LS 150 LED

Sensor-switched LED floodlight


LS 150 LED

black

EAN 4007841 052546



Detection Zone

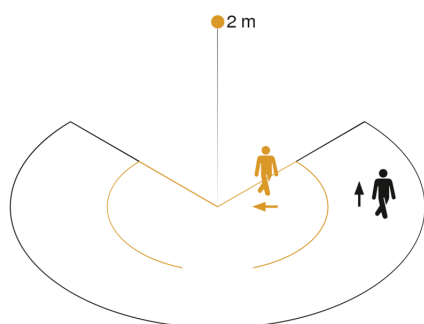

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

