




Wirelessly connected device with Zigbee protocol from the ChoruSmart system. It can be used with Home Gateway for "CONNECTED SMART HOME" solutions and with Smart Gateway for "HOME AND BUILDING PRO" solutions. Ideal for residential and small commercial offices, new builds and renovations. Zigbee technology is a secure and reliable technology in which data is encrypted and every node within the network ensures reachability across all devices (mesh network). This device can also be used without Home Gateway and Smart Gateway (manual configuration with dip-switch or via IoT Configurator), in which case supervision via the app is not possible.

Categorie	Actuator for generic loads	Protocol de comunicații	Zigbee (IEEE 802.15.4)
Tensiune de alimentare	230V ac - 50 Hz	Nr. canale în ieșire	2
Contacte de ieșire	2 NO 6A (AC1) 230 V ac	Output power	8 dBm
Putere max disipabilă (W)	2,3 W	230V incandescent-halogen lamps	1400 W
CFL lamps	150 W	230V LED lamps	150 W
Loads controlled from toroidal transformers	450 W	Loads controlled from electronic transformers	600 W
Putere max motor	500 W	Standard	2014/53/EU
Clasă de protecție IP	IP20	Temperatură de funcționare	-5 ÷ +45 °C
Temperatură de stocare	-25 ÷ +70 °C	Relative humidity (non-condensative)	Max 93%
Dimensiuni LxHxP (mm)	42x40x20	Electrocod	051A

DIMENSIONAL

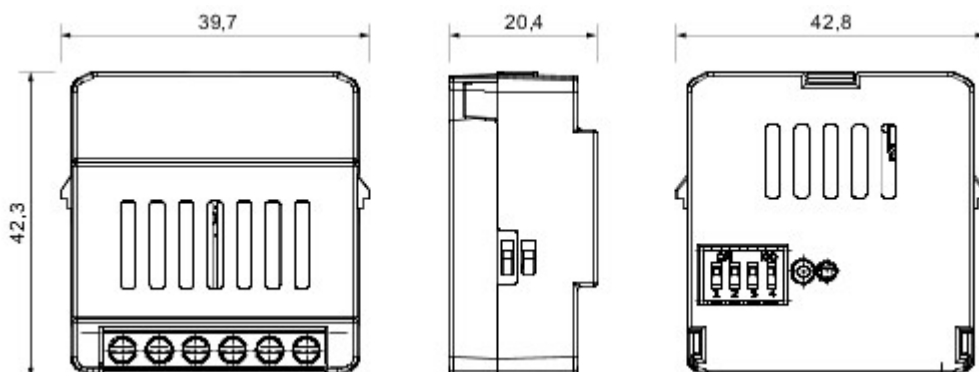

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 08/09/2023

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice