


PHILIPS

Ledinaire Waterproof

WT060C

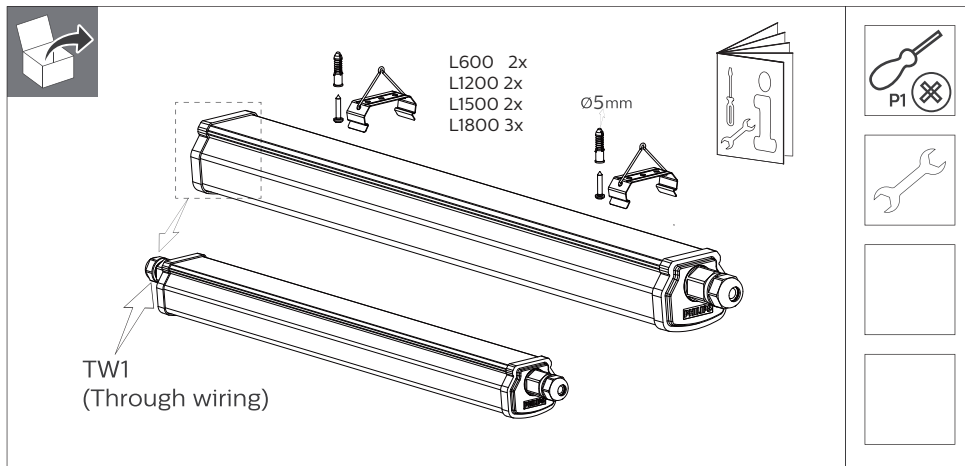

Type		System lumen (Lm)	CCT	P(W)	A	A-TW1	Energy efficiency class of light source	
WT060C LED18S/840 PSU L600		1800	4000	15	611		c	0.38
WT060C LED25S/840 PSU L1200		2500	4000	20	1201		c	0.75
WT060C LED25S/840 PSU TW1 L1200	●	2500	4000	20		1258	c	0.80
WT060C LED36S/840 PSU L1200		3600	4000	30	1201		c	0.75
WT060C LED36S/865 PSU L1200		3600	6500	30	1201		c	0.75
WT060C LED36S/840 PSU TW1 L1200	●	3600	4000	30		1258	c	0.80
WT060C LED34S/840 PSU L1500		3400	4000	28	1501		c	0.95
WT060C LED34S/840 PSU TW1 L1500	●	3400	4000	28		1558	c	1.00
WT060C LED56S/840 PSU L1500		5600	4000	46	1501		c	0.95
WT060C LED56S/865 PSU L1500		5600	6500	46	1501		c	0.95
WT060C LED56S/840 PSU TW1 L1500	●	5600	4000	46		1558	c	1.00
WT060C LED80S/840 PSU L1800		8000	4000	65	1801		c	1.21

