

PHILIPS

Ledinaire
Surface-mounted
SM060C

Scan me!

DOWNLOAD

50Hz
60Hz

220V
240V

LIFE
L80
50k hrs

LIFE
L70
75k hrs

IP20

IK03

Max.
40 °C
Min.
10 °C

GLOW
WIRE
650 °C

	Luminaire luminous flux (lm)	CCT (K)	Driver	Light source of energy efficiency class	System power (W)	
SM060C G2 34_40S/840 PSU W20L120 NOC	3400/4000	4000	PSU	D	28/33	2.87
SM060C G2 34_40S/840 PSU W20L120 OC						

Dimensions in mm

Inrush current

	LED34S	LED40S
Electrical characteristics		
I _{max} (A)	17.5	17.5
T _{ref} (μs)	120	120
MCB	Luminaires Max.	
B-10A	40	40
B-16A	60	60
C-10A	45	45
C-16A	70	70

The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur,Chlorine, Phthalates, etc, are present.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES


© 2026 Signify Holding All rights reserved

Printed in China
Data subject to change without notice
Keep for future reference : www.philips.com/lighting



1/3



Push-in connectors

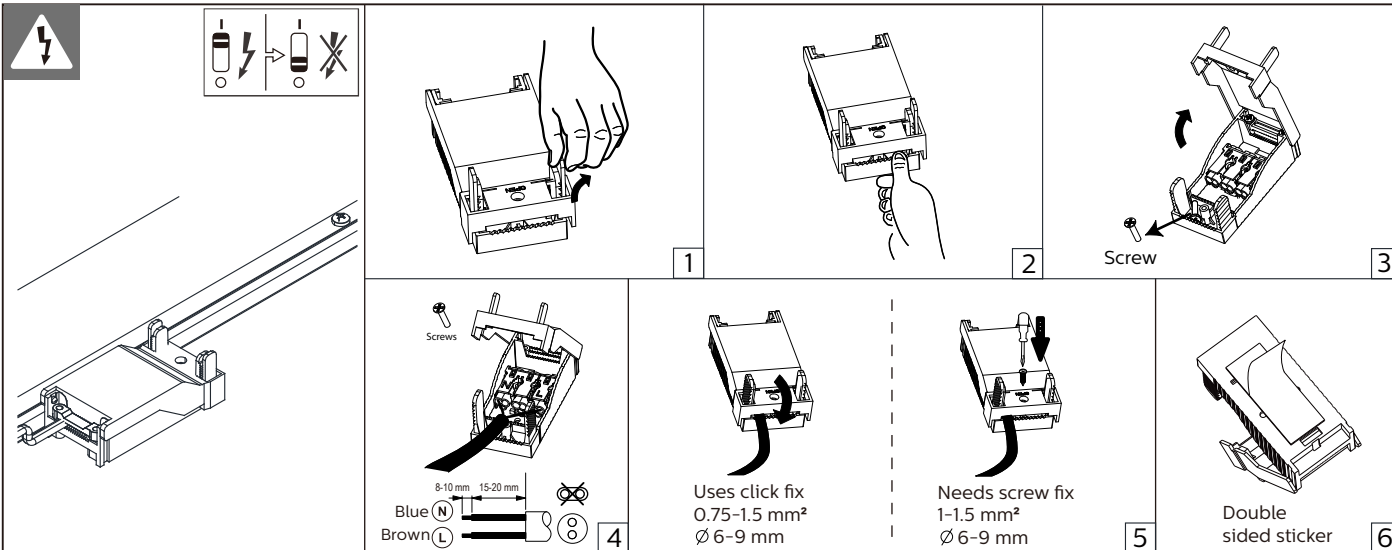

MultiLumen selection on driver

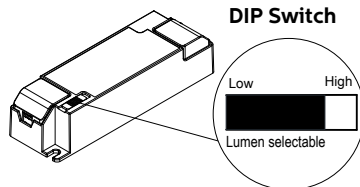


PSU	4.000 K	
PIN	Lumen	Power
Low	3.400 lm*	28 W*
High	4.000 lm	33 W


* Default setting




Surface mounted

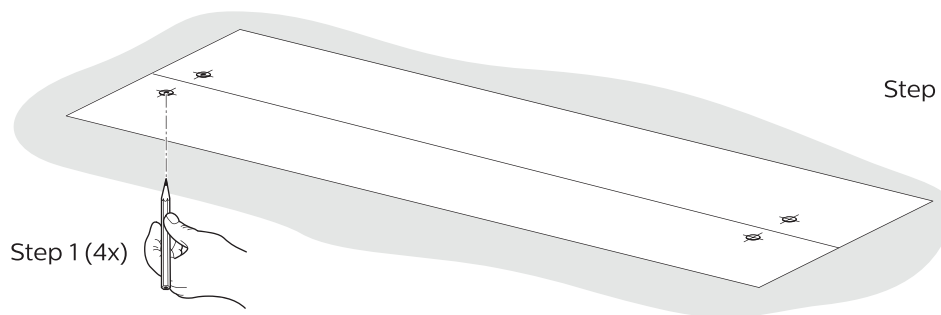

Step 2 (4x)








1

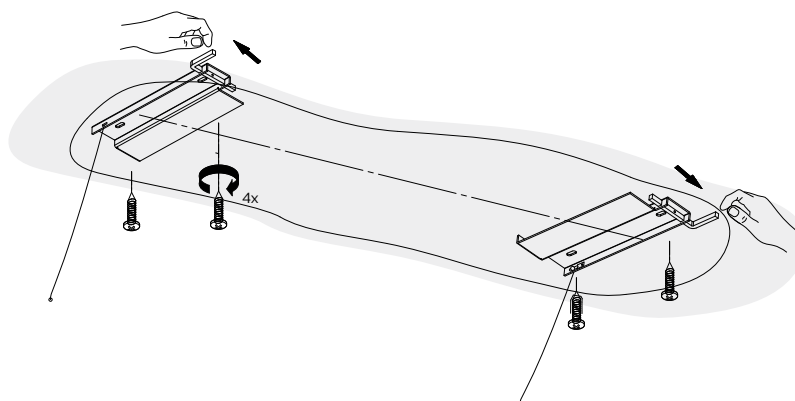

2

3

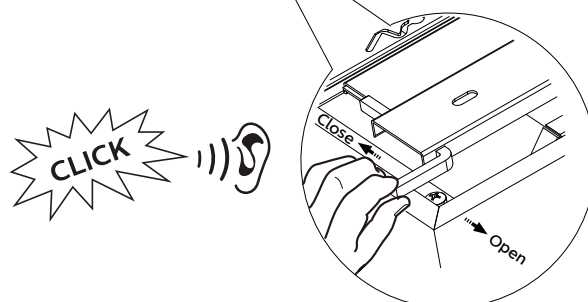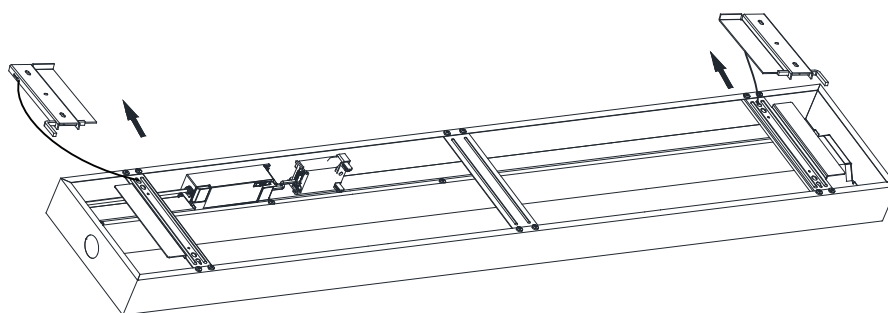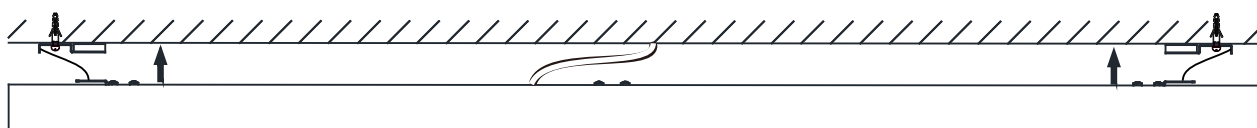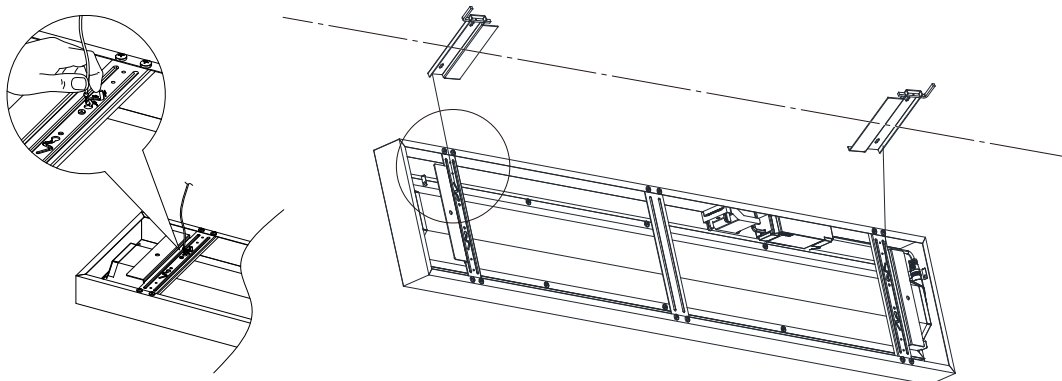

4