

Ledinaire surface-mounted
SM065C

IP40

**220V
240V**

**50Hz
60Hz**

Life
50K hrs
@L80



Life
75K hrs
@L70

Max.
35°C
Min.
-10°C



**GLOW WIRE
650 °C**


Energy efficiency class of light source
D

	IP	IK	L×W×H1 (mm)	
SM065C 41S/840 PSU W60L60 OC	IP40/IP20	IK02	595x595x40	2
SM065C 41S/840 PSU W60L60 NOC	IP40/IP20	IK02	595x595x40	1.6
SM065C 41S/840 PSU W60L60 OC 4PK	IP40/IP20	IK02	595x595x40	1.9
SM065C 41S/840 PSU W60L60 NOC 4PK	IP40/IP20	IK02	595x595x40	1.6

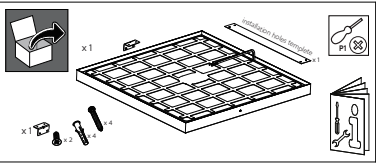


Surface mounted

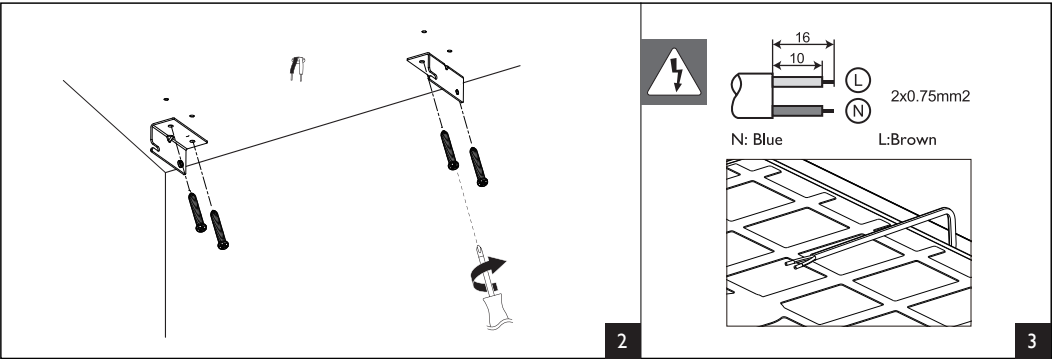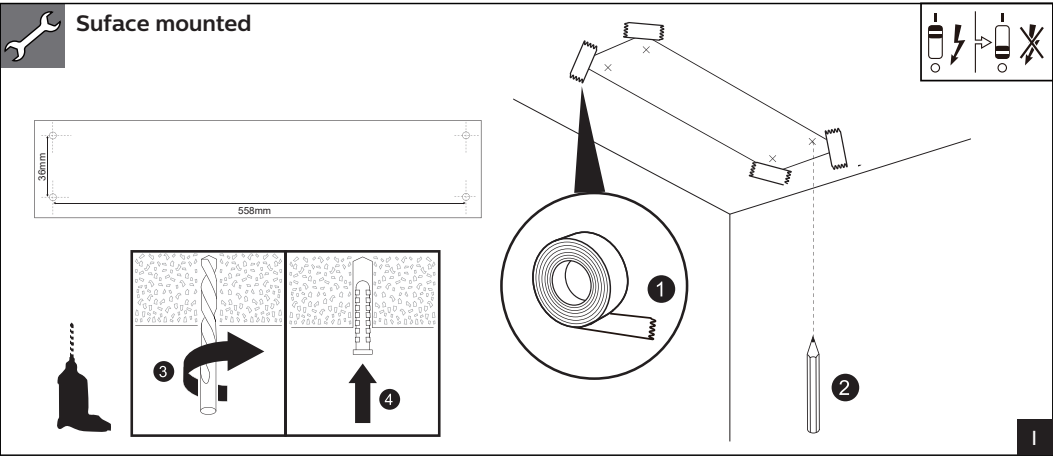


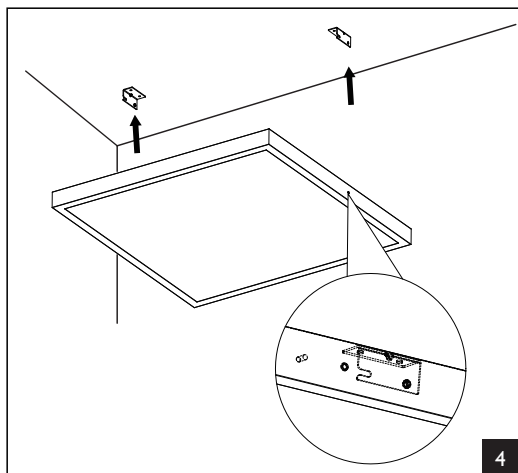


4

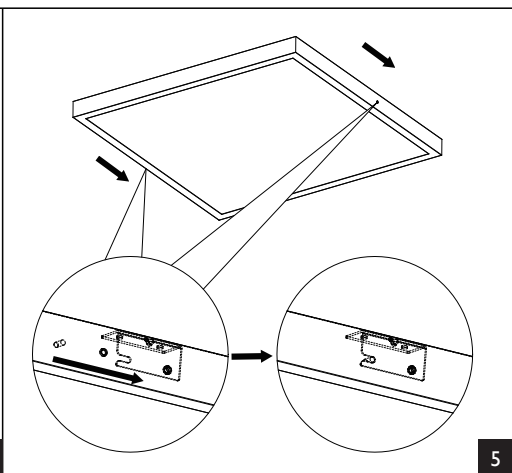

5

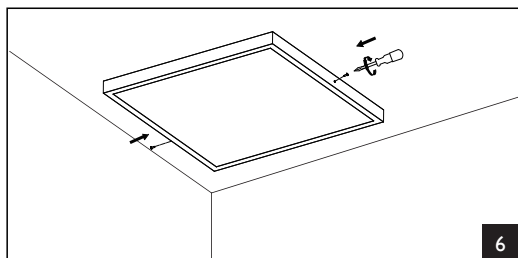


6

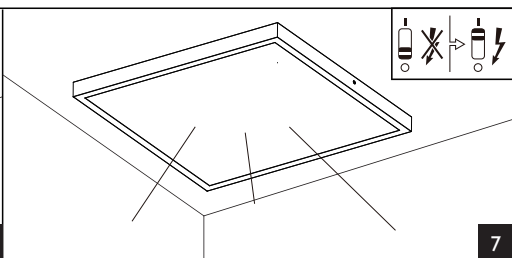

7

Inrush current



34W Electrical characteristics	
I _{max} (A)	17.8
T _{ref} (μs)	287
MCB Luminaires Max.	
B-10 A	11
B-13 A	15
B-16 A	20
C-10 A	21
C-13 A	28
C-16 A	35