

BVP167 LED73/830_40_65
PSU 65W AWB

911401883386



Ledinaire All-in floodlights, 65 W, 7000 lm, 7350 lm, 3000 K, 4000 K, 6500 K, CRI80, Asymmetrical, IP65

Aluminium die cast, Grey, Traffic grey B (RAL7043), Single layer powder coating, Driver integrated on LED board (DoB), All-in, Multi Color Temperature, 7000 lm, 7350 lm, 65 W, 115 lm/W, 110 lm/W, 3000 K, 4000 K, 6500 K, (0.440,0.403); (0.369,0.364); (0.313,0.337) SDCM<5, CRI80, Asymmetrical, IP65 | Dust penetration-protected, jet-proof, IK08 | 5 J vandal-protected, Safety class I, Surge protection level until 1.5 kV differential mode and 1.5 kV common mode, Cable 2.0 m without plug, Flying leads/cables

General Information

Lamp family code	LED73-4S [LED module, system flux 7400 lm]
Number of gear units	Unit
Driver included	Yes
Light source engine type	LED system in flux
Service Tag	No
Value ladder	Value
Warranty period	5 years

Light Technical

Upwards light output ratio	0
Luminous Flux	7,000 lm
Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	115 lm/W
Colour rendering index (CRI)	>80
Light source colour	Multi Colour Temperature
Optic type	Assymetric beam angle
Luminaire light beam spread	92° x 52°
Optic type outdoor	Asymmetrical
All-in Type	All-in, Multi Color Temperature
Effective projected area	0.037625 m ²

Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 or 60 Hz
Inrush current	7.7 A
Inrush time	0.01315 ms
Power Consumption	65 W
Power Factor (Fraction)	0.95
Connection	Flying leads/cables
Cable	Cable 2.0 m without plug
Number of products on MCB (16 A type B)	30
Suitable for random switching	Not applicable
Protection class IEC	Safety class I
Surge Protection (Common/Differential)	Surge protection level until 1.5 kV differential mode and 1.5 kV common mode
Total harmonic distortion	20 %

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Driver integrated on LED board (DoB)
Constant light output	No
Embedded control	-
Photocell	-

Mechanical and Housing

Housing material	Aluminium die cast
Reflector material	Polycarbonate
Optic material	Glass
Optical cover/lens material	Tempered glass
Fixation material	Steel
Housing Colour	Grey
Mounting device	Via U Shaped Bracket, Aiming Scale Angle, Universal Installation
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	286 mm
Overall width	203 mm
Overall height	33 mm
Dimensions (height x width x depth)	33 x 203 x 286 mm
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Standard tilt angle post-top	27°
Standard tilt angle side entry	-
Optical cover type	Glass
Net Weight (Piece)	1.430 kg

Emergency Operation

Central Emergency	No
-------------------	----

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	-
Photobiological risk	Photobiological risk group 1 @200mm to EN62778
Photobiological risk specification	0.2 m

EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM)	1
Ambient temperature range	-25 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.440,0.403); (0.369,0.364); (0.313,0.337) SDCM<5
Power consumption tolerance	+/-10%
Init. Colour Rendering Index Tolerance	-2
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	7.5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L80
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 75000 h	L70


Sustainability Data

Sustainability rating	Unclassified
Repair class	Repair Class D, this product is not designed to be repaired.
Embedded carbon (A1-A3)	11.5 kg CO ₂ e
Product non-virgin material ratio	22.9 %
Recyclable the content ratio of the finished product	59.8 %
GWP total B6 (kg CO ₂ eq) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO ₂ eq / kwh)
GWP total B6 (kg CO ₂ eq) Functional Unit	Please calculate using your local energy mix value: POWER DECLARED UNIT (kW) * 1000 (lm) / LUMEN OUTPUT DECLARED UNIT (lm) * 35000 (hrs) * ENERGY MIX (kg CO ₂ eq / kwh)

Product Data

Order product name	BVP167 LED73/830_40_65 PSU 65W AWB
Full product name	BVP167 LED73/830_40_65 PSU 65W AWB
Full EOC	872016973611599
Order code	911401883386
Material no. (12 NC)	911401883386
Numerator – quantity per pack	1
EAN/UPC — Product/Case	8720169736115
Numerator – packs per outer box	10
EAN/UPC - Case	8720169736306

Dimensional drawing

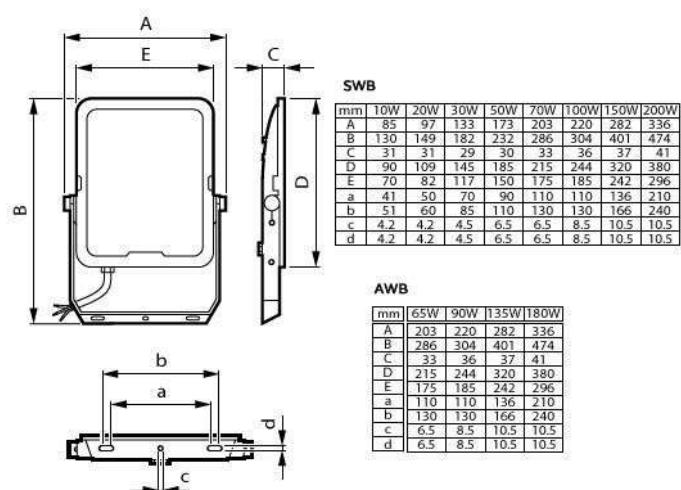

Related Documents

Documents and certificates	Document Name	Download
Environmental Product Declaration	EPD-HUB-EPD-Philips-Ledinaire-All-in-floodlights-BVP167-Ref-911401883386.pdf	Download 
Environmental Product Declaration	EPD-PHILIPS-BVP167-LED73-830-40-65-PSU-65W-AWB-911401883386.pdf	Download 
Installation Instructions	Mounting-instruction-Ledinaire-Floodlight-All-in-AWB.pdf	Download 
Photometry and lighting design	Document Name	Download
LDT File	Ledinaire-Flood-BVP167-1xLED73-830-40-65-840-PSU-AWB.Idt	Download 
IES File	BVP167-LED73830-40-65-PSU-65W-AWB.ies	Download 