


Ledinaire Panel
RC065B/RC066B

Scan me!
DOWNLOAD







Safety cable
(include in RC065B)

2
1500mm x 1





IP20
IP40

RG0

220V
240V

50Hz
60Hz



Life
50K hrs
@L80

Life
75K hrs
@L70


Max.
35°C
Min.
-10 °C

GLOW
WIRE
650 °C



	IP	IK	L×W×H1 (mm)	
RC065B G5 345/840 PSU W60L60 OC SC	IP40/IP20	IK02	595x595x35	1.65
RC065B G5 345/840 PSU W60L60 NOC SC	IP40/IP20	IK02	595x595x34	1.35
RC065B G5 345/840 PSD W60L60 OC SC	IP40/IP20	IK02	595x595x35	1.65
RC066B 345/840 PSU W62L62 OC	IP40/IP20	IK02	620x620x35	1.75
RC066B 345/840 PSD W62L62 OC	IP40/IP20	IK02	620x620x35	1.75
RC065B G5 345/840 PSU W60L60 OC 6PK SC	IP40/IP20	IK02	595x595x35	1.65
RC066B 34_365/830_40 PSU W62L62 OC	IP40/IP20	IK02	620x620x35	1.75
RC065B G5 34_365/830_40 PSU W60L60 OC SC	IP40/IP20	IK02	595x595x35	1.65
RC065B G5 34_365/830_40 PSU 60x60 NOC SC	IP40/IP20	IK02	595x595x34	1.35
RC065B G5 34_365/830_40 PSD W60L60 OC SC	IP40/IP20	IK02	595x595x35	1.65
RC065B G5 34_365/830_40 PSU 30x120 OC SC	IP40/IP20	IK02	295x1195x35	1.75
RC065B G5 34_365/830_40 PSD 60x60 NOC SC	IP40/IP20	IK02	595x595x35	1.35

Energy efficiency class of light source
D



L
H
W


90°

*DC Connector

* RC065B with DC connector,
RC066B without DC connector


VPC visible profile ceiling



SP suspended


SM surface mounted



PCV plaster ceiling

Available as accessory (Need to purchase separately)


Suspension set:
911401809487: RC159Z Suspension set SME-3 WH
911401809387: RC159Z Suspension set SME-4 WH


1x
4x
1x
8xST3.2
5xø6
5xST4


Plaster set:
911401809287:
RC159Z Plaster Ceiling SMB-PLC


4x
8x
3.5x5


Safety cable:
911401809187: RC159Z Safety Cable






4x ST3.2
2x
1x
2x
1x


Surface mounted set:
911401808087:RC059Z SMB W60L60
911401808187:RC059Z SMB W62L62
911401808287:RC059Z SMB W30L120


2x
2x
12 x
4x/6x

Surface mounted set:
911401807787:RC159Z SMB W60L60
911401807887:RC159Z SMB W62L62
911401807987:RC159Z SMB W30L120


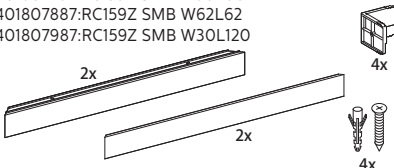

2x
2x
4x
4x

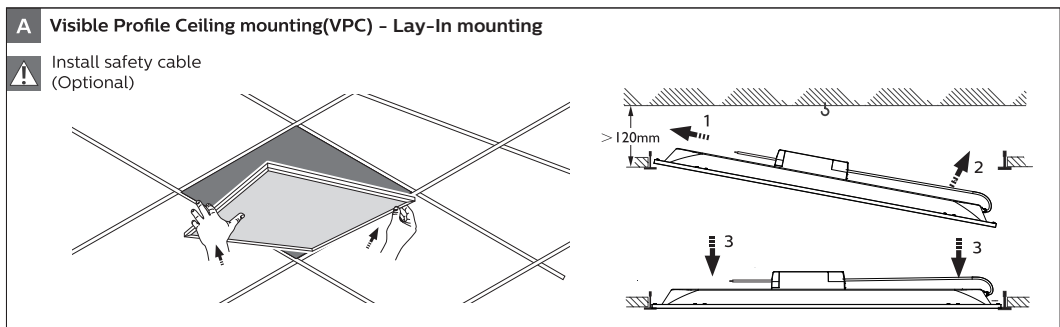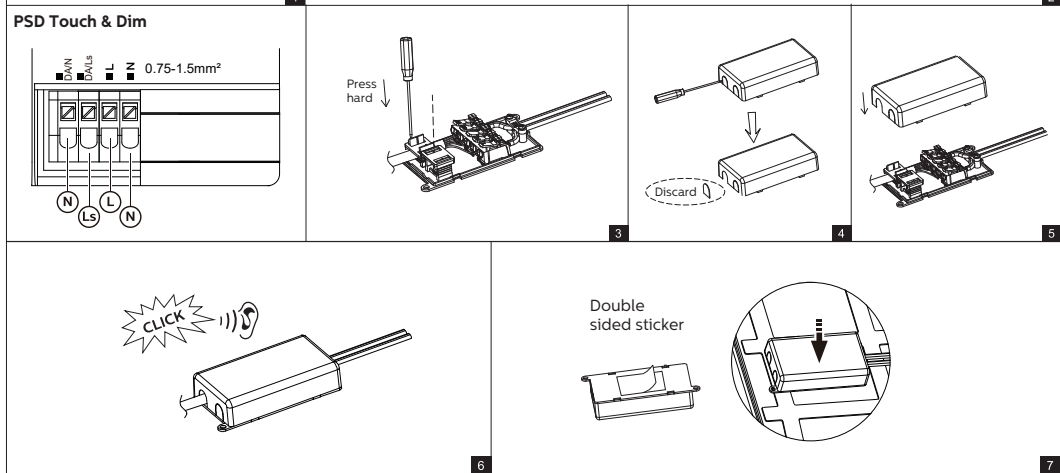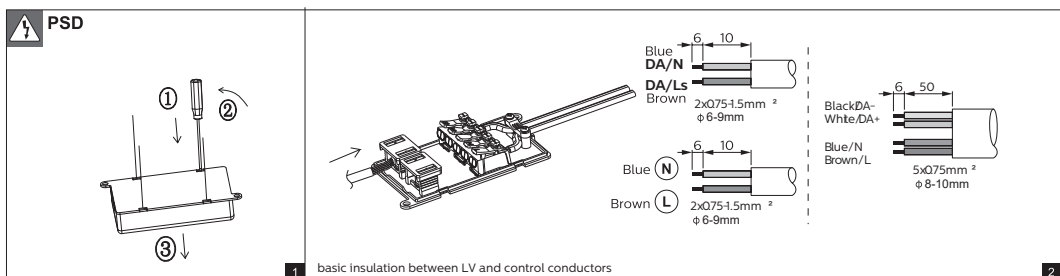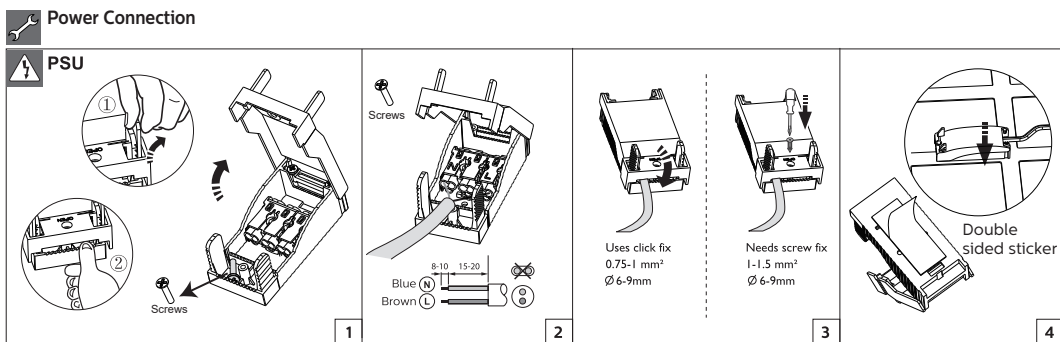

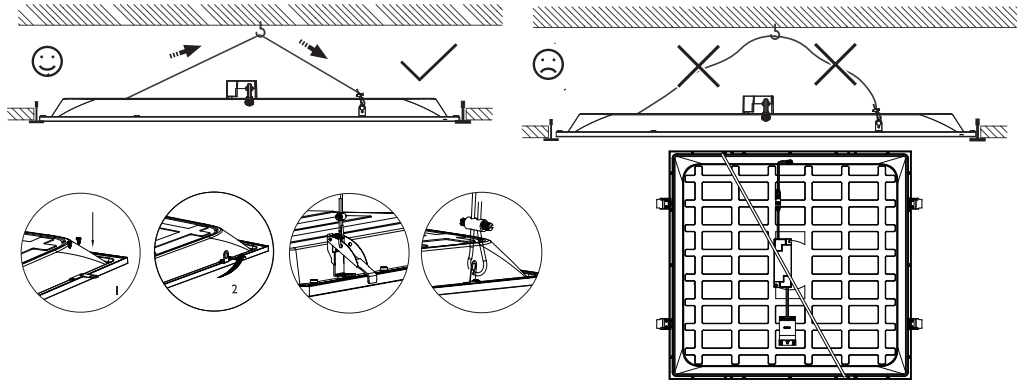


All-in: Multi Color switch set your color temperature
3000K, 3500K or 4000K (=default)

Colour Temperature selectable			
Drive	3000K	3500K/4000K	Wattage
PSU	3400lm	3600lm	30W
PSD	3400lm	3600lm	28W

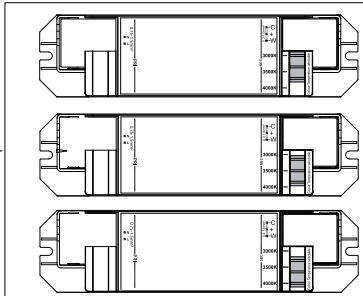

Inrush current

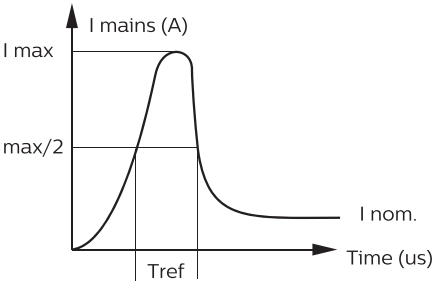

	28W PSU	28W PSD	30W PSD
Electrical characteristics			
I _{max} (A)	18.7	25.8	22
T _{ref} (μs)	218	255	250
MCB	Luminaires Max.		
B-10 A	13	9	6
B-13 A	18	13	8
B-16 A	23	17	10
C-10 A	24	17	10
C-13 A	32	23	13
C-16 A	39	28	17