

DN065C G4 LED12/830
12W 220-240V 6-D175

929003251532



Ledinaire SlimDownlight, Surface-mounted, 12 W, D175 mm, 1200 lm, 3000 K, Beam angle 110°, White, IP20/40

Surface-mounted, D175 mm, Metal-Plastic, White, Power supply unit (On/Off), 1200 lm, 12 W, 100 lm/W, 3000 K, (0.44, 0.403) SDCM≤5, Beam angle 110°, IP20/40 | Finger-protected;Wire-protected, IK03 | 0.3 J, Safety class II, Screw connection block 2-pole

General Information

Light source replaceable	No
Driver included	Yes
Light source engine type	LED
Lighting Technology	LED
Mounting	Surface
Value ladder	Value
Warranty period	3 years

Light Technical

Luminous Flux	1,200 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color rendering index (CRI)	80
Light source color	830 warm white
Optic type	Beam angle 110°

Luminaire light beam spread	110°
Unified glare rating CEN	28
Photobiological safety according to EN 62471	RG0

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Inrush current	3.85 A
Power Consumption	12 W
Power Factor (Fraction)	0.9
Connection	Screw connection block 2-pole
Number of products on MCB of 16 A type B	74
Protection class IEC	Safety class II
Total harmonic distortion	30 %

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Metal-Plastic
Reflector material	-
Housing Color	White
Overall length	175 mm
Overall width	175 mm
Overall height	27 mm
Overall diameter	175 mm
Dimensions (Height x Width x Depth)	27 x 175 x 175 mm
Ingress protection code	IP20/40 [Finger-protected;Wire-protected]
Mech. impact protection code	IK03 [0.3 J]
Mounting	Surface
Net Weight (Piece)	0.380 kg

Approval and Application

Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.7
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.44, 0.403) SDCM≤5
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5

Over Time Performance (IEC Compliant)

Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L65
---	-----


Sustainability Data

Repair class	Repair Class D, this product is not designed to be repaired.
Non-virgin material ratio of the packaging	Cardboard > 80% recycled
Packaging Recyclable content ratio	Cardboard recycling rate > 80%
Packaging Material	Cardboard


Product Data

Order product name	DN065C G4 LED12/830 12W 220-240V 6-D175
Full product name	DN065C G4 LED12/830 12W 220-240V 6-D175
Full product code	871951446447600
Order code	929003251532
Material Nr. (12NC)	929003251532
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514464476
Numerator - Packs per outer box	12
EAN/UPC - Case	8719514464483


Dimensional drawing

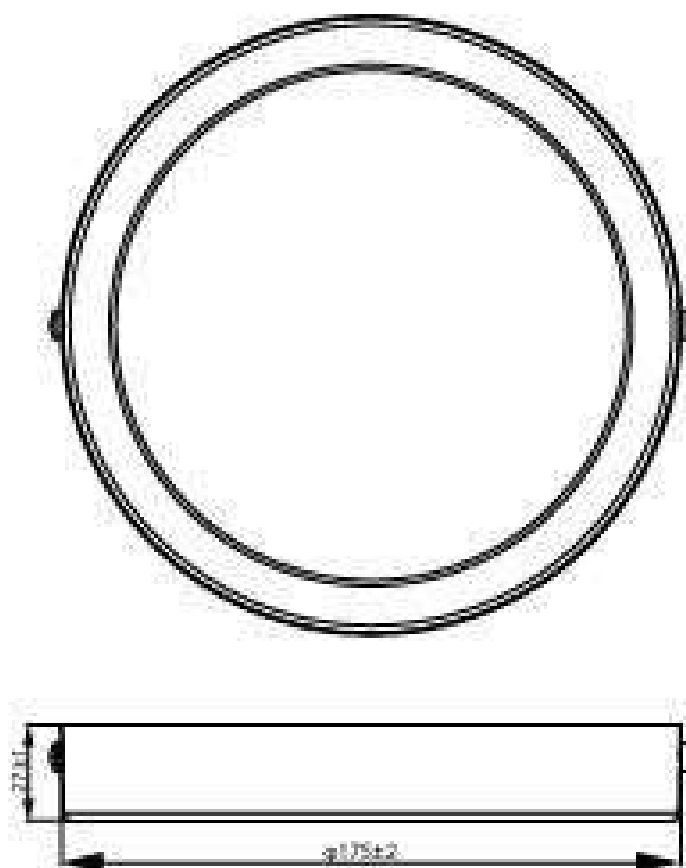

Photometric data

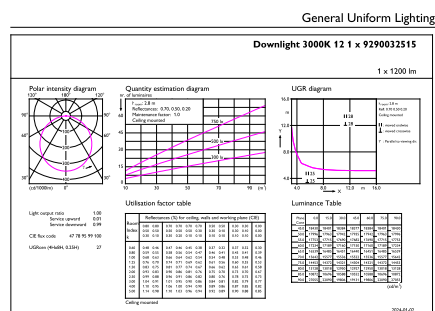

General uniform lighting - DN065C G4 LED12/830 12W
220-240V 6-D175

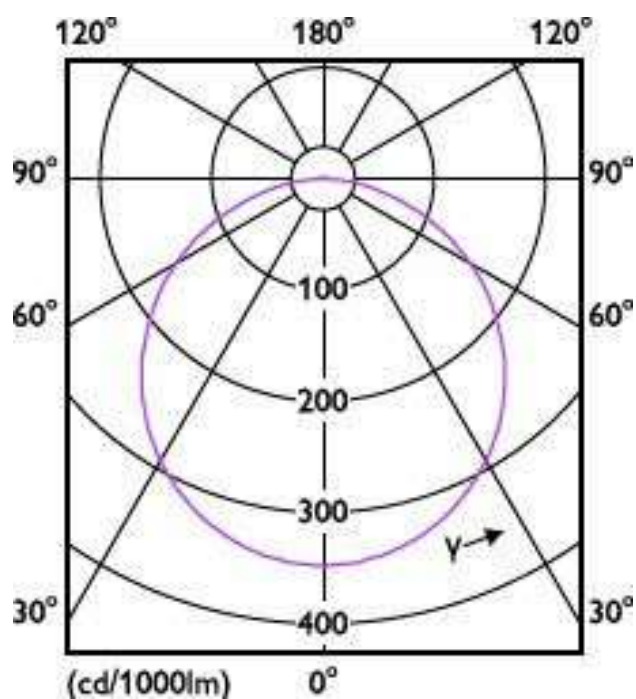

Light Distribution Diagram - DN065C G4 LED12/830 12W
220-240V 6-D175

Related Documents

Documents and certificates	Document Name	Download
Installation Instructions	Downlight_DN065C_G4_324165985701_V2_Online-INI.pdf	Download 
Environmental Product Declaration	EPD-Philips-DN065C-G4-LED12-830-12W-220-240V-6-D175-929003251532-20240730.pdf	Download 

Photometry and lighting design	Document Name	Download
IES File	DN065C-G4-LED12-830-12W-6-D175-IES.ies	Download 