





















PHILIPS

Ledinaire SlimDownlight


DN065C

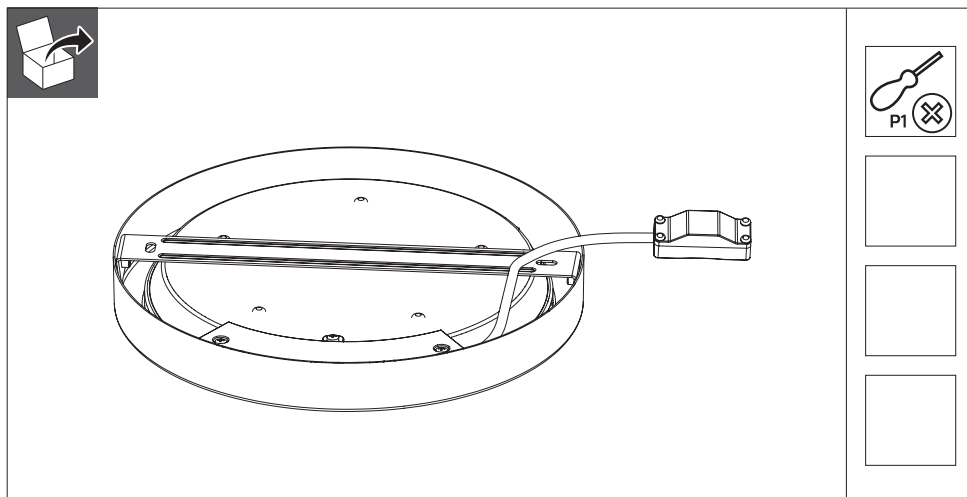

Model	Product Description	Power(W)	CRI(Ra)	CCT(K)	Total Lumen(lm)	Energy efficiency class of light source	Dimension AxB(mm)	Mounting size C(mm)	Weight (kg)
9290032515	DN065C G4 LED12/830 12W 220-240V 6-D175	12	80	3000	1200	F	φ175*27	140	0.38
9290032516	DN065C G4 LED12/840 12W 220-240V 6-D175	12	80	4000	1200	F	φ175*27	140	0.38
9290032517	DN065C G4 LED20/830 19W 220-240V 8-D225	19	80	3000	2000	F	φ225*27	190	0.58
9290032518	DN065C G4 LED20/840 19W 220-240V 8-D225	19	80	4000	2000	F	φ225*27	190	0.58

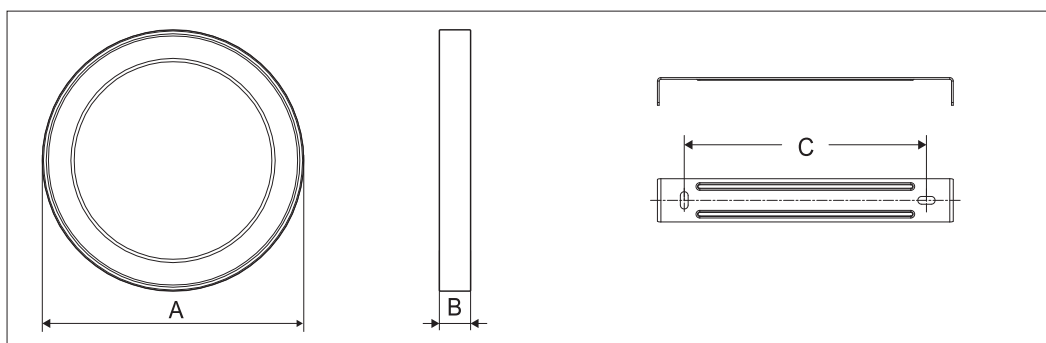

Inrush Current

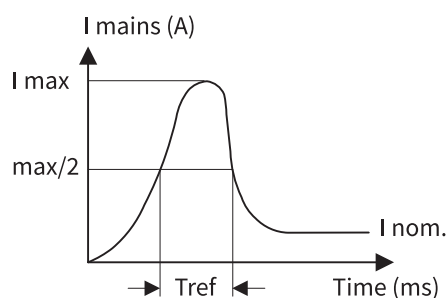

	9290032515 9290032516	9290032517 9290032518
Electrical characteristic		
I _{max} (A)	3.85	4.92
T _{ref} (μs)	0.101	0.115
MCB	Luminaire Max.(pcs)	
Type B-10A	46	34
Type B-16A	74	55
Type C-10A	78	59
Type C-16A	125	95